




Excellence in heavy-duty refractive index measurement

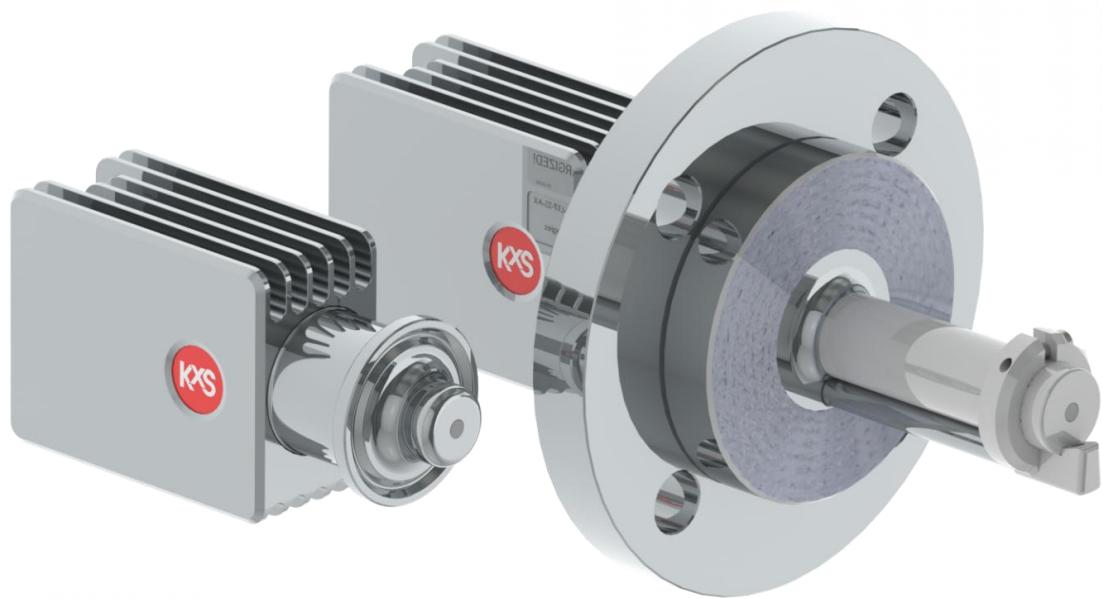

KxS industrial process refractometer
DCM-20 for chemical process control

Technology that is built on over 40 years of industry-leading experience

KxS industrial process refractometer DCM-20 is engineered for precise, real-time concentration and density measurements in chemical processing, heavy industry, or any application requiring high precision under industrial or extreme conditions.

The DCM-20 consists of a compact, or probe sensor and it comes with flange or Sandvik coupling process connections and flow cells for easy installation in process pipes and vessels.

The DCM refractometer provides a full measurement range of 0-100%wt or g/l, utilizing two independent 4-20mA outputs and a digital Modbus TCP output for connectivity to automatic process control systems.

For enhanced functionality, an optional HMI unit offers a local display and interface, ensuring user-friendly operation.

Engineering Excellence service for customized solutions

For applications beyond standard configurations, our KxS Engineering Excellence team delivers customized solutions — E.g., special alloys and tailor-made process connections.



Applications

- Define chemicals at loading and unloading stations
- Achieve and ensure product quality in Chlor-Alkali processes
- Correlate scrubber efficiency in liquid/gas treatment systems
- Optimize steam feed in glycerol evaporation processes
- Control chemical fiber and textile processes, particularly various spinning bath solutions and solvent recovery
- And more

Installation

DCM-20-P (probe model)
installation directly into vessel or
large pipe with DIS/ANSI/JIS
flange connection



DCM-20-L (Compact model) installation with single-piece
flow cell and clamp or flange ends makes installation easy
into straight pipelines




Scalable to process line size

Digital and analog M12 connectors



The DCM-20 operates with a 24 VDC
input power supply and offers
flexible communication options,
including analog (4-20 mA) and
digital (Modbus TCP)

When using the analog signal, the
digital port serves as a service port
for configuration and diagnostics via
a computer web browser, external
display, or mobile device

All port options can be utilized
simultaneously, providing seamless
integration and monitoring
capabilities

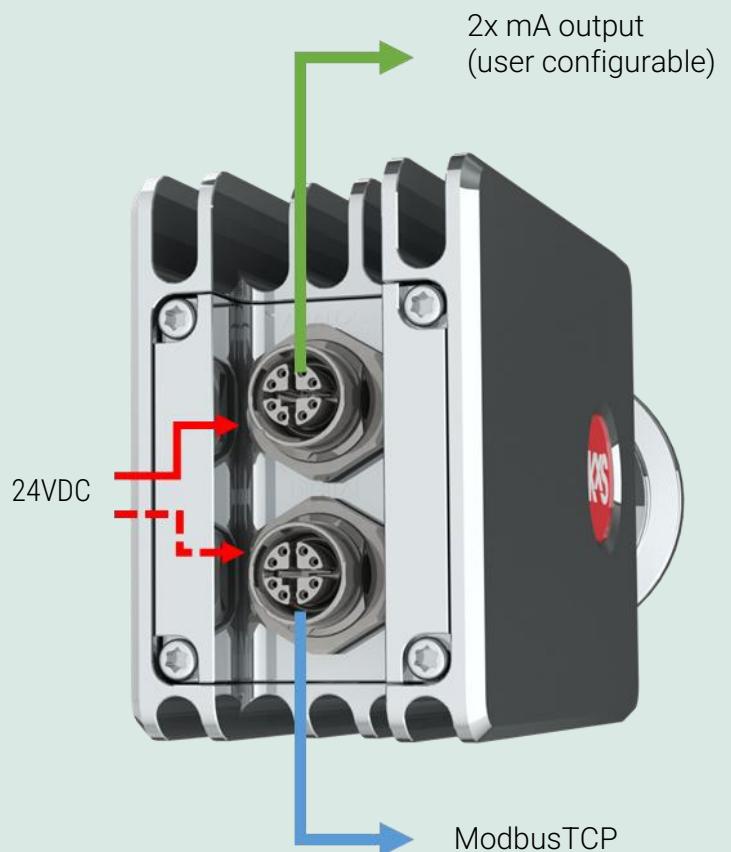

Key design features

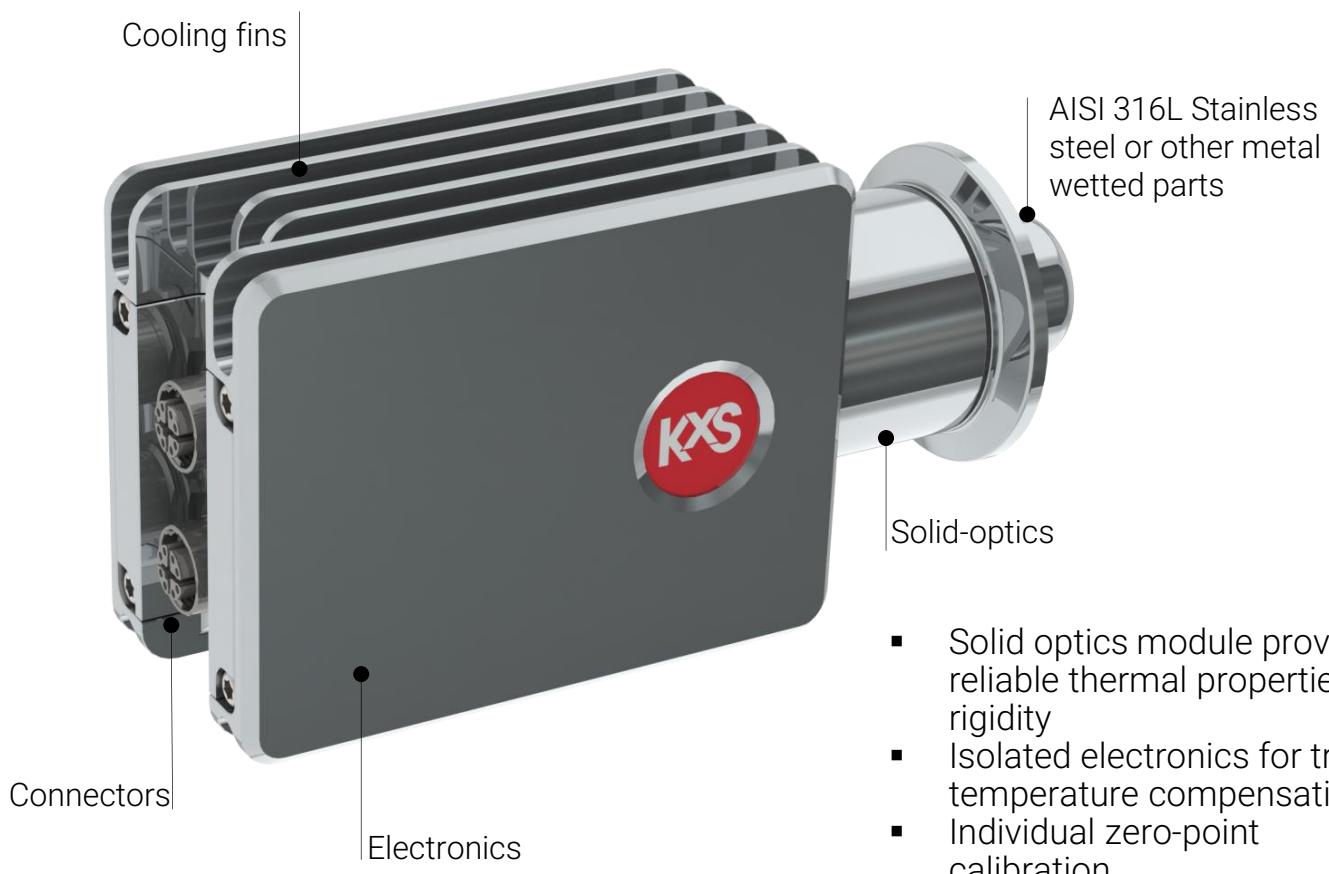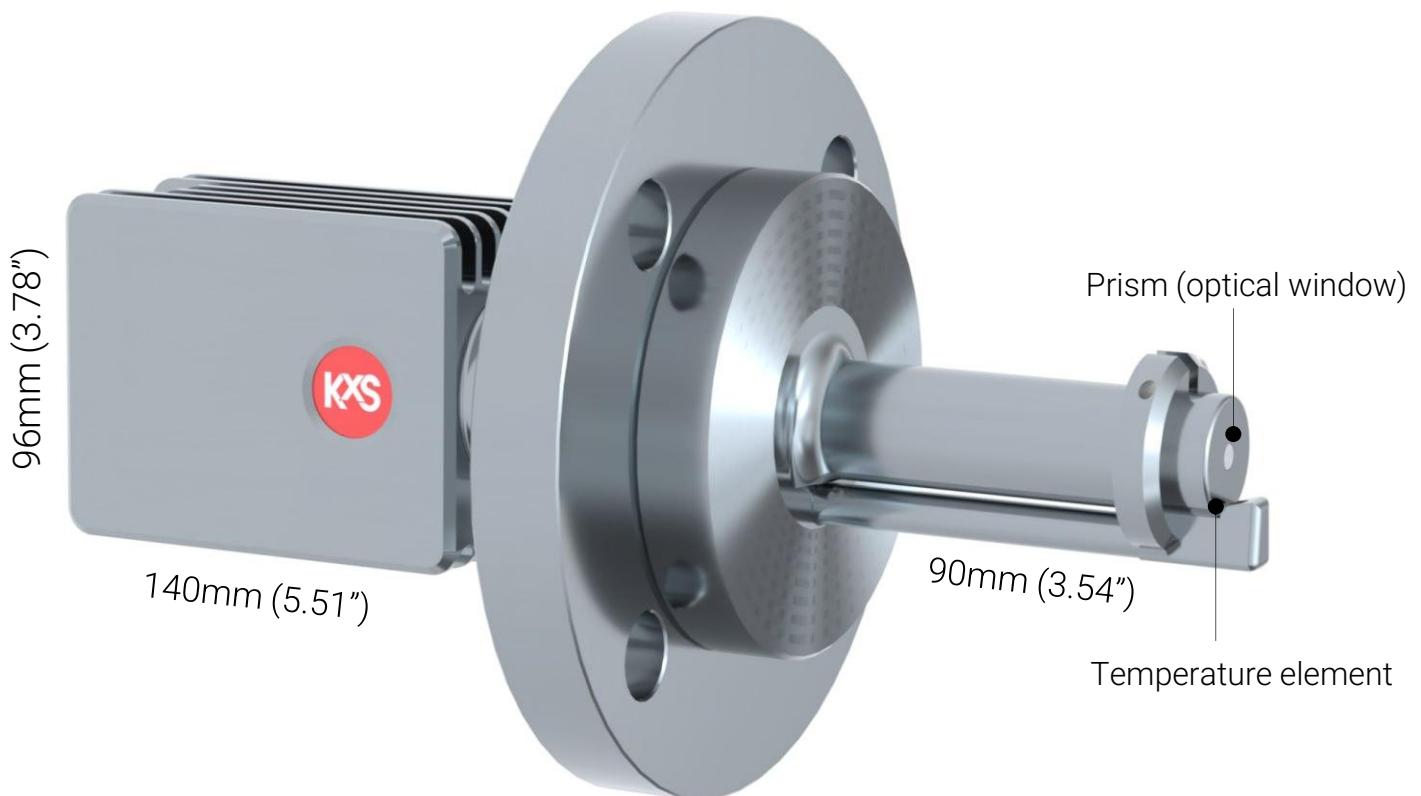


Optical refractive index measurement principle

KxS process refractometers DCM (digital concentration monitoring) employ the physical phenomenon of Refractive Index to define liquid concentration.

Optical concentration measurement is based on Snell's law and the critical angle of total reflection to provide precise readings.

Light is emitted from an LED and directed towards the interface between an optical window and the liquid being measured. As the concentration of the liquid changes, specific angles of the light are totally reflected and partially reflected back, producing light and shadow interface that is captured by a digital camera sensing element.

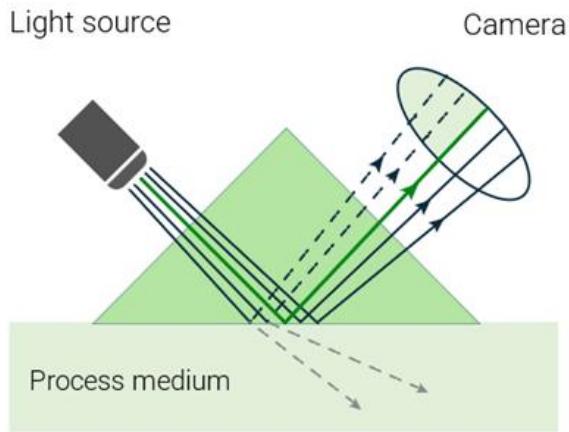

This interface is detected by the light-activated camera pixels and converted into refractive index (RI).

The RI values can be directly used or further translated into any concentration units, such as % by weight or density g/l. This method ensures that measurement signals are provided instantaneously, allowing for real-time process control.

User interface options

The DCM-20 offers dual 4–20 mA outputs and Modbus TCP for modern automation integration. Measurement, diagnostics and configuration are accessed through the built-in web interface on computer, tablet or mobile device, and no transmitter is required.


For facilities requiring local monitoring and operator interface, the Modular Connection Unit (MCU) provides a stainless-steel transmitter with display and access functions:

- Direct, easy to use touch screen interface
- Displays measurement data and diagnostic information locally or to automation systems through analog 4-20 mA and digital Modbus TCP
- Includes wash relays
- Stainless steel enclosure, IP66
- Top cover and touch screen splatter guard protect against dirt and rain

Modular Connection Unit (MCU) SP-8000



Web HMI

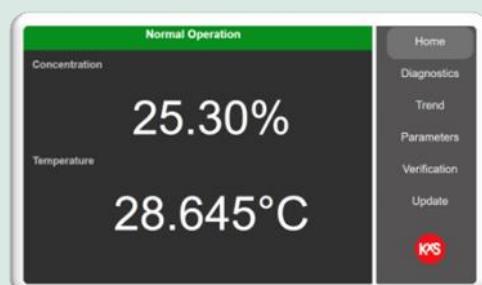

KxS Industrial process refractometer DCM-20 specifications

Refractive Index range:	Full range, nD=1.3200...1.5300 (equal by definition to 0...100%wt) Optional range nD=1.3600...1.5900 (high refractive index applications with YAG optical window)
Output units:	Conc% / g/cm ³ / refractive index unit RIU
Measurement precision:	± 0.025%wt
Measurement accuracy:	± 0.0006 refractive index unit RIU
Speed of response:	1 sec. undamped
Optics:	No mechanical adjustments and digital measurement with 4000 pixel camera, 589 nm wavelength (sodium D-line) light emitting diode (LED), built-in Pt-1000 temperature sensor (linearization according to IEC 751)
Temperature compensation:	Automatic, individual zero point calibration
Calibration:	NIST traceable calibration, verification with standard RIU liquids
Wetted parts:	AISI316L EN 1.4435 Stainless steel, Sapphire prism (optical window,) PTFE prism gasket Optional: Alloy 20, Hastelloy C-276, Titanium, Tantalum Sensor housing: AISI316 Stainless Steel
Wetted parts chemical compatibility	Depends on various operational conditions, such as pressure and temperature. The final responsibility for ensuring compatibility with the specific application rests with the customer. KxS provides assurance (e.g. material certifications) to verify compliance with the materials chosen by the customer.
Process connection:	DIN/ANSI/JIS flange or Coupling L clamp directly or via Single-piece flow cell SFC
Process pressure:	-1...55 bar (-14.5...800 psi) depending on process connection
Process temperature:	-40°C (-40°F)...150°C (302°F) continuous process temperature
Ambient temperature:	-40°C (-40°F)...65°C (149°F)
Sensor protection class:	IP67, Nema 4X
Installation:	Indoor/Outdoor, unclassified area
Sensor weight:	5.7kg, 12.6lbs (DCM-20-P probe model with flange) 1.3 kg, 2.9 lbs (DCM-20-L compact model)
Outputs and connections	
Digital M12 connector:	24VDC power supply, Modbus TCP for user interface and PLC connection, standard cable length 10 m(33 ft), max 70 m(230 ft)
Analog M12 connector:	24VDC power supply, 2 pcs independent 4-20 mA user configurable outputs, standard cable length 10 m(33 ft), max, 200 m(660 ft). Max. load 1000 Ohm
Sensor Power consumption:	max. 2.5W
Options:	
Modular Connection Unit MCU with enclosure, display/user interface Independent 7" Web HMI, full color touch screen interface	
Prism (optical window) wash with automatic steam, automatic high-pressure water or mechanical washer for SFC flow cell	
Direct integration with Rockwell's PLC for Ethernet IP communications	
ATEX/IECEx approval for Ex ec mc IIC t4 Gb/Gc	

